



Český metrologický institut

Notifikovaná osoba č 1383, Okružní 31
638 00 Brno

EC-TYPE EXAMINATION CERTIFICATE

Number: TCM 141/07 - 4492

Addition 3

Issued by: Český metrologický institut
Okružní 31
638 00 Brno
Czech Republic

Notified Body No. 1383

In accordance with: point 3 of annex 2 to Government Order No. 464/2005 Coll. (annex B of the Directive 2004/22/EC) from 19 October 2005 that lays down technical requirements on measuring instruments and implements in Czech Republic Directive 2004/22/EC of the European Parliament and of the Council.

Manufacturer: TATSUNO-BENČ EUROPE a.s.
(applicant) Pražská 2325/68
678 01 Blansko
Czech Republic

In respect of: AdBlue dispenser
type: SHARK BMP 2xxx.S/AdB

Type of liquids	AdBlue (32.5 % of urea, water and additives according to DIN 70070)
Accuracy class	0.5

Valid until: 16 January 2017

Document number: 0115-CS-A005-07

Description: Essential characteristics, approved conditions and special conditions, if any, are described in this certificate. This certificate contains 17 pages.

Date of issue: 10 May 2010




RNDr. Pavel Klenovský

Notified Body No.1383

1. Measuring device description

The SHARK BMP 2xxx.S/AdB AdBlue dispensers are destined for measurement of AdBlue (32.5 % of urea, water and additives according to DIN 70070) volumes as a legal measuring device in the sense of the Directive of the European Parliament and of the Council no. 2004/22/EC of measuring instruments, as amended and are used for the filling separate storage tanks of heavy-duty vehicles with reduction of NO_x in exhaust gases of diesel engines SCR-technology (Selective Catalytic Reduction).

The measuring systems consist of a filter, measurement transducer, electronic calculator with electronic or electromechanical totalizing indicating device, electromagnetic valve (optionally), sight glass (optionally) and house with delivery nozzle. There is internal heating to heat all hydraulic to above 0 °C. These AdBlue dispensers can be equipped with pre-setting device.

These measuring systems can be installed in one AdBlue dispenser and they can be connected to one electronic calculator only.

The SHARK BMP 2xxx.S/AdB AdBlue dispensers are intended for installation in centrally pumped system only; non-return valve had to be installed between pump and AdBlue dispenser.

There is SHARK MOD 2xxx.S/AdB AdB module, the same hydraulic without electronics, to connect to SHARK BMP 2xxx.S fuel dispensers, which was certified separately.

The SHARK BMP 2xxx.S/AdB AdBlue dispensers could be connected into independent Point of Sale or Paying terminal, which do not influence metrology parameters of measuring system.

1.1. Measuring transducer

TATSUNO FM-1022 measuring transducer consists of a flow sensor with four pistons and cyclic volume 0.5 L, TATSUNO EK – 1025 two-channel photoelectric transducer with 50 pulses / revolution and adjustment device.

TATSUNO FM-1022 measuring transducer can be adjusted by varying of the strokes of one pair of pistons by the adjustment screw. The regulation is non-continual with steps 0.08 %. Maximum range of adjustment is about ± 1 %. Location of screw is protected by pin.

1.2. Calculator

There are three different models of PDE electronic calculator. Models PDEVOL can control one measuring system only, model PDEDUO can control two measuring systems and model PDEMPD can control ten measuring systems maximally, two simultaneously. PDEVOL calculator do not consist price indicating device.

Software version 3.34

The PDE electronic calculator can be operated by buttons of IR module (remote control). It is necessary to change over value of number of pulses per L, which is stored in memory of calculator (parameter P 44) for electronic calibration. Access to electronic calibration is secured by switch SW1 (location OFF – left site) with sealing cover, alternatively in case of model PDEDUO by DIP switch SW1-1 (location ON – up) with sealing cover.

There are two different models of PDEX electronic calculator. Model PDEDUOX can control two measuring systems and model PDEMPDX can control ten measuring systems maximally, two simultaneously. Calculator PDEX can operate separately or can be controlled by central system of filling station. It can communicate by RS485 by PDE, PumaLAN and ER4 protocol.

Software version 1.03

W&M checksum 20260

The PDEX electronic calculator can be operated by buttons of IR module (remote control). It is necessary to change over value of number of pulses per L, which is stored in memory of calculator (parameter P 44) for electronic calibration. Access to electronic calibration is secured by DIP switch SW1-1 (location ON – up) with sealing cover.

There are two different models of TBELTx electronic calculator. Model TBELT2 can control two measuring systems and model TBELT4 can control four measuring systems at maximum, two simultaneously. Calculator TBELTx can operate separately or can be controlled by central system of filling station. It can communicate by RS485 by PDE, PumaLAN and ER4 protocol.



Software version 1.01
W&M checksum 8CA4

TBELTx electronic calculator can be operated by four buttons keyboard. It is necessary to change over value of number of pulses per dm^3 , which is stored in memory of calculator (parameter P14, P15, P16 and P17) for electronic calibration. Access to electronic calibration is secured by DIP switch SW1-1 (location ON – up) with sealing cover.

There are three different models of Beta Control type ADP/T electronic calculator. Model ADP1/T can control one measuring system only, model ADP2/T can control two measuring systems and model ADPMPDx/T can control ten measuring systems at maximum (e.g. 2×5 products). There is version SMX which can control parallel mounting of two meters; fuel is dispensed via one nozzle.

This calculator can be operated by communication line or KL-SERINF remote controller. Electronic calibration is realized by automatic procedure “Electronic calibration of the meters and ATC“, (manual chapter 2.2.7). Access to electronic calibration is secured by DIP switch No. 2 (location OFF). Access to ATC conversion function setting is secured by DIP switch No. 3 (location OFF). DIP switches are protected by sealing cover.

The ADP/T electronic calculator can operate separately or can be controlled by central system of filling station. It communicate by RS485 (EASY-CALL), or by IFSF standard (LON FTT-10 or TCP/IP-Ethernet).

The electronic calculator family ADP/T was certified separately by CMI, Notified Body No. 1383 in EC - type examination certificate No. TCM 141/07 - 4505.

1.3. Hose

ELAFLEX AdBlue DN 16; maximum length 5.1 m

1.4. Nozzle

ELAFLEX ZVA AdBlue

2. Basic technical data

Maximum flowrate Q_{\max} [L/min]	40
Minimum flowrate Q_{\min} [L/min]	4
Min. measured quantity MMQ [L]	2
Maximum unit price (number of digits)	9999 (4)
Maximum price to pay (number of digits):	999999 (6)
Type of display:	Electronic
Type of liquids	AdBlue (32.5 % of urea, water and additives according to DIN 70070)
Liquid temperature range	-10 to +30
Maximum pressure [MPa]	0.4
Accuracy class	0.5
Ambient temperature range [°C]	-25 to +55 -40 to +50 with additional internal heating
Mechanical class	M1
Electromagnetic class	E1
Humidity	Condensing
Location	Open

3. Test

Technical tests of the SHARK BMP 2xxx.S/AdB AdBlue dispensers were performed with conformity to International Recommendation OIML R 117-1 *Dynamic measuring systems for liquids other than water*, Test Report No. 6031-PT-P019-06 from December 21. 2006, Test Report No. 6015-PT-P006-08 from April 25. 2008 (PDEX extension), Test Report No. 6015-PT-P027-08 from December 22. 2008 (ADP/T extension) and Test Report No. 6015-PT-P0002-10 from April 28. 2010 (TBE extension).

4. The measuring device data

There are following data on the measurement sensor, pulser, and the electronic calculator:

- Measuring device manufacturer and type
- Serial number and year of manufacture

There are following data on each measuring system:

- The "CE" marking and supplementary metrology
- Number of EC-type examination certificate
- Measuring device manufacturer and type
- Serial number and year of manufacture
- Accuracy class
- Minimum measured quantity (MMQ)
- Maximum flowrate (Q_{\max})
- Minimum flowrate (Q_{\min})
- Maximum pressure (P_{\max})
- Type of liquids
- Liquid temperature range
- Ambient temperature range
- Mechanical class
- Electromagnetic class

There are following data on each face of indicating device:

- Currency unit of price (€), near price indication
- Unit of volume (ℓ or L or word Litre), near volume indication
- Currency unit of unit price (€ / L or € / Litre), near unit price indication
- Information regarding the minimum measured quantity (MMQ)

5. Sealing

The switch SW1 has to be set to position OFF (left site) in case of PDEMPD electronic calculator.

The DIP switch SW1-1 has to be set to position ON (up) in case of PDEDUO, PDEX and TBELTx electronic calculators.

The DIP switches No. 2 and 3 have to be set to position OFF in case of ADPxxx electronic calculator.

The each measuring system has to be sealed after the tests with positive result:

On the measurement transducer:

- | | |
|---|----|
| a) Conjunction of transducer body with pistons covers | 1× |
| b) Conjunction of adjustment device pin with piston cover and type plate | 1× |
| c) Conjunction of transducer body with upper cover and pulser and totalizer, if any | 1× |
| d) Conjunction of transducer body with bottom cover | 1× |

On the calculator:

- | | |
|--|----|
| e) Conjunction of calculator cover with calculator console and SW1 switch cover, if separate | 1× |
| f) Conjunction of cover of electromechanical totalizer with display mask, if separate | 1× |
| g) The type plate of calculator | 1× |


On the dispenser:

- | | |
|---|----|
| h) Conjunction of dispenser name plate with fuel dispenser frame | 1× |
| i) The symbol of relevant measuring system on the name plate | 1× |
| j) The fuel dispenser data sheet (identification of data on document) | 1× |


Additional sealing points beyond the requirements of OIML R 117-1 and WELMEC 10.6 can be used on special request of the local W&M authority.




Picture No. 1: The sealing of SHARK BMP 2xxx.S/AdB AdBlue dispenser

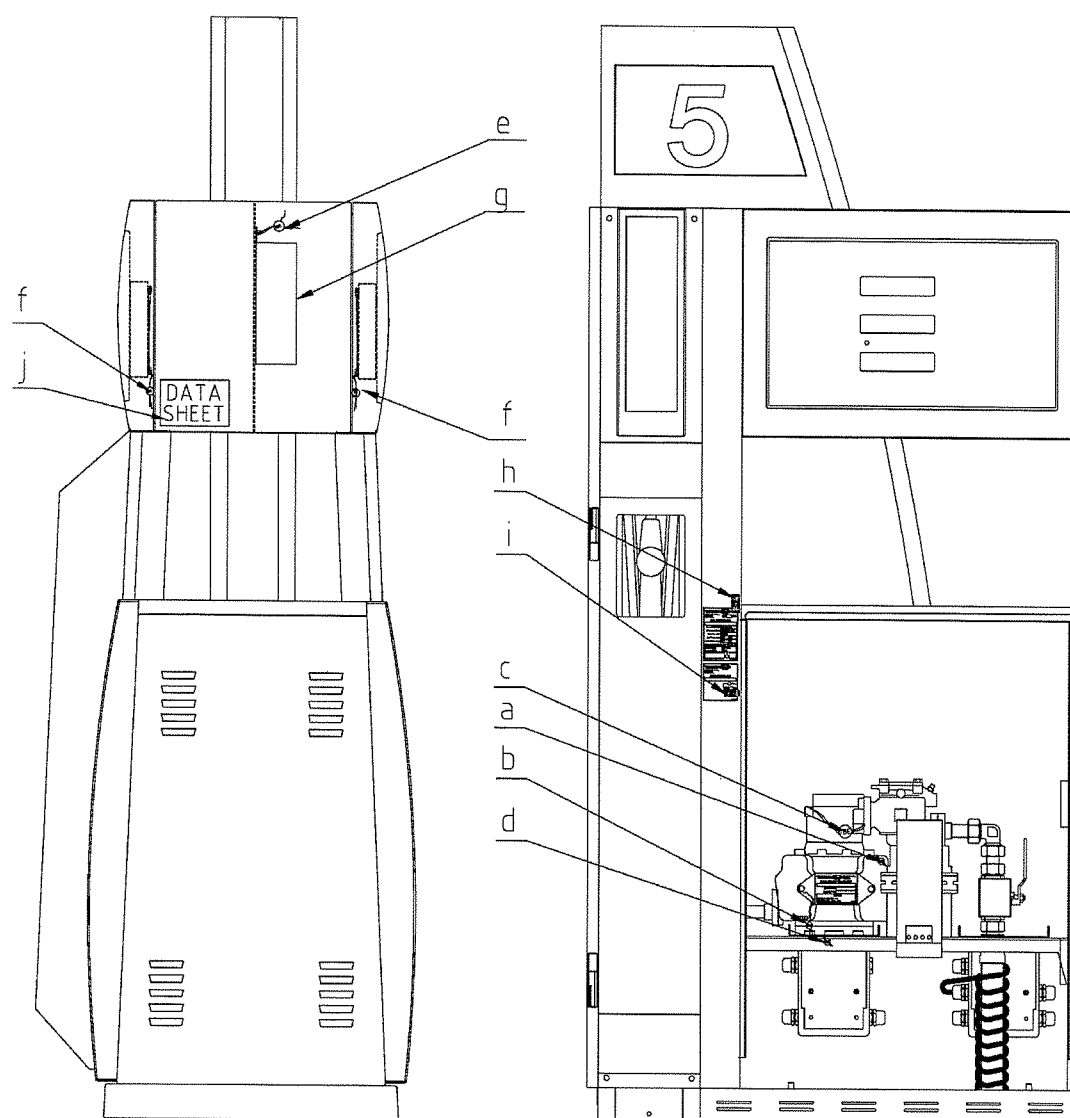


Picture No. 2: The sealing of FM-1022 measuring transducer

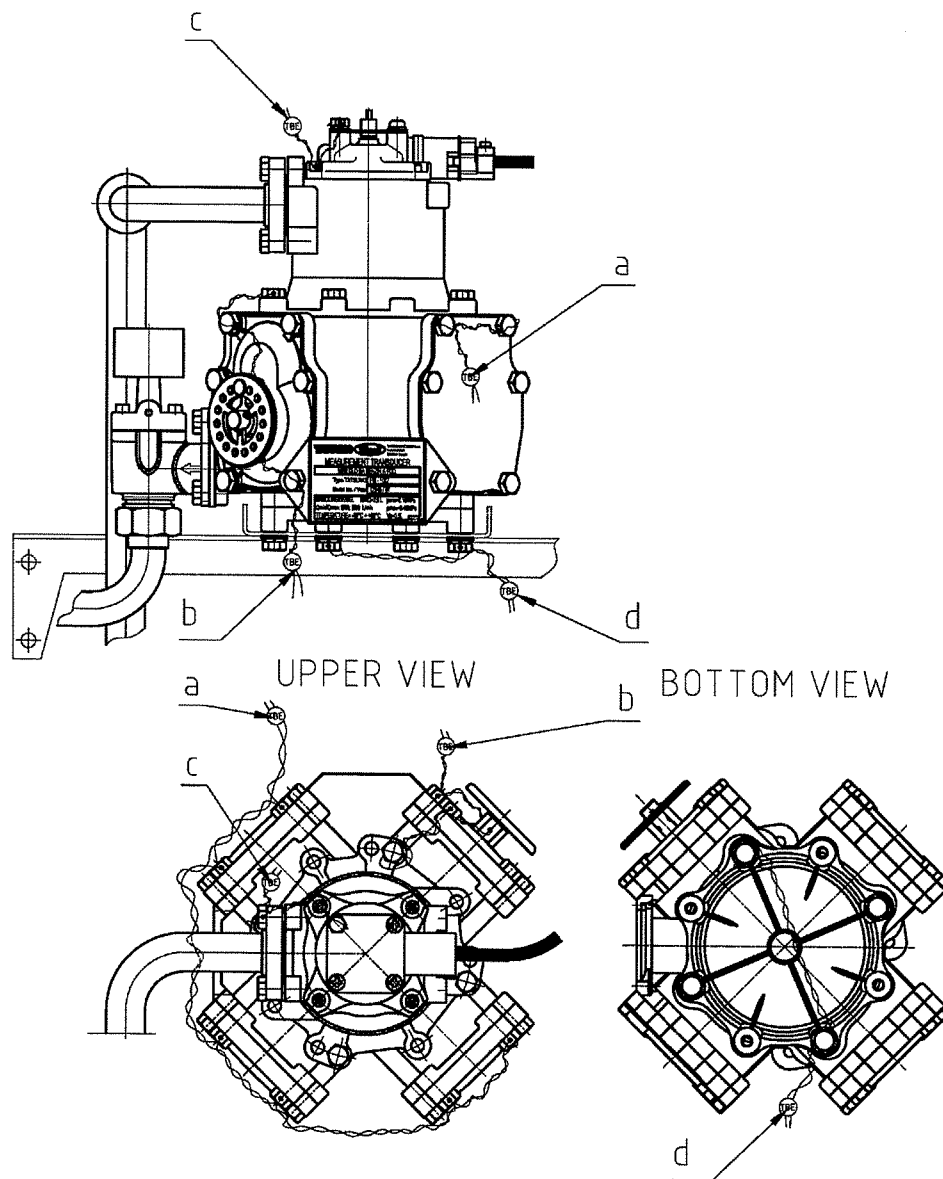

Picture No. 3: The sealing of PDEMPD calculator

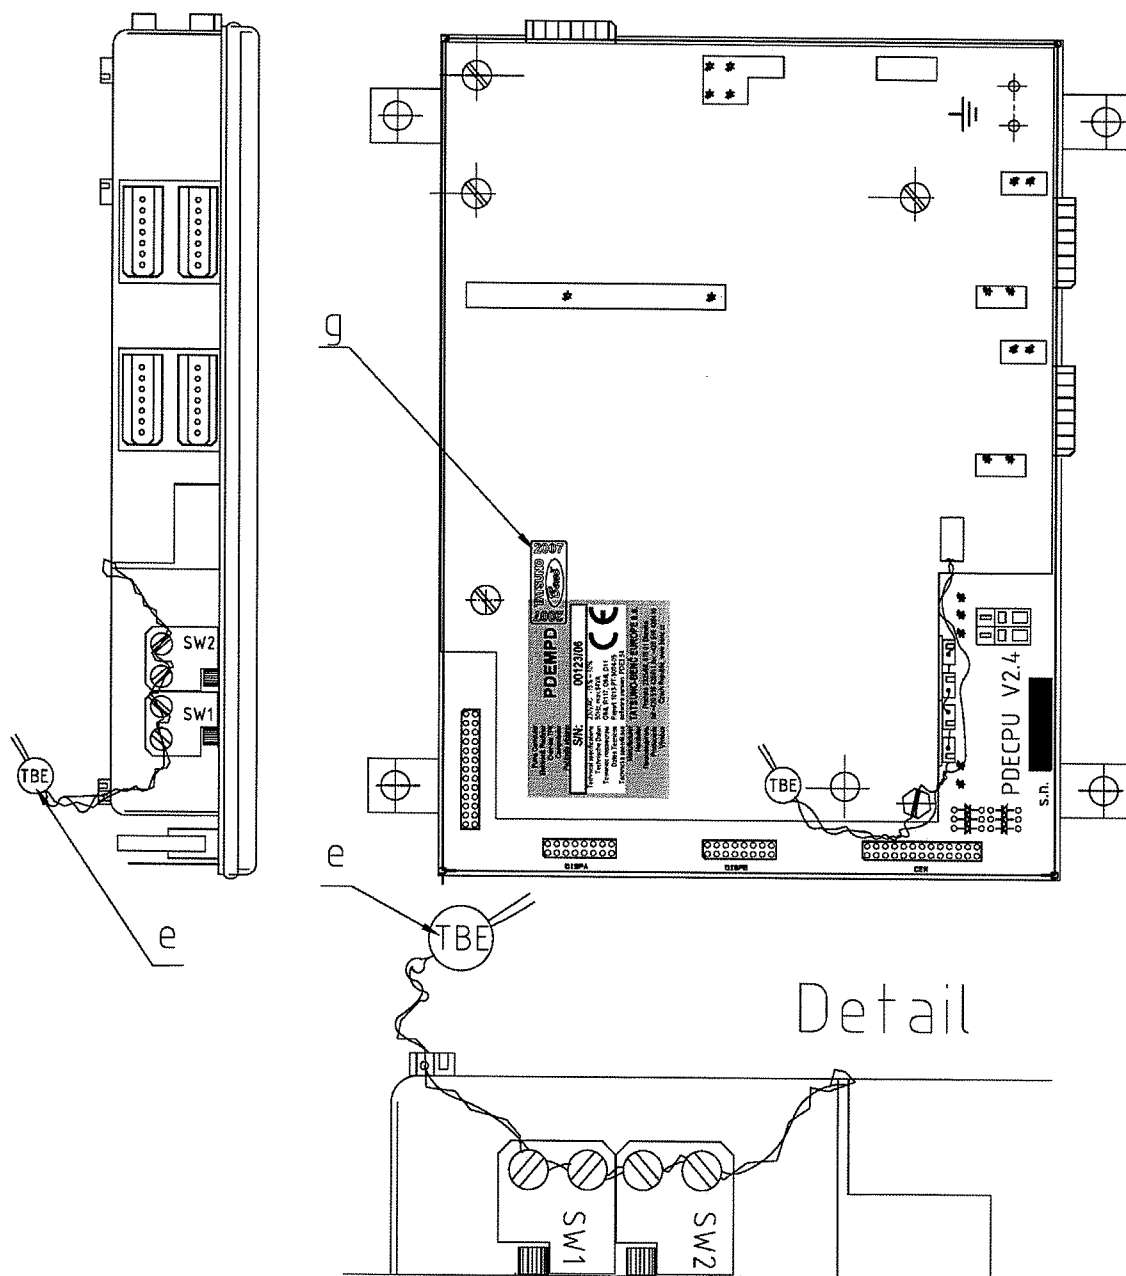


Picture No. 4: The sealing of PDEDUO calculator

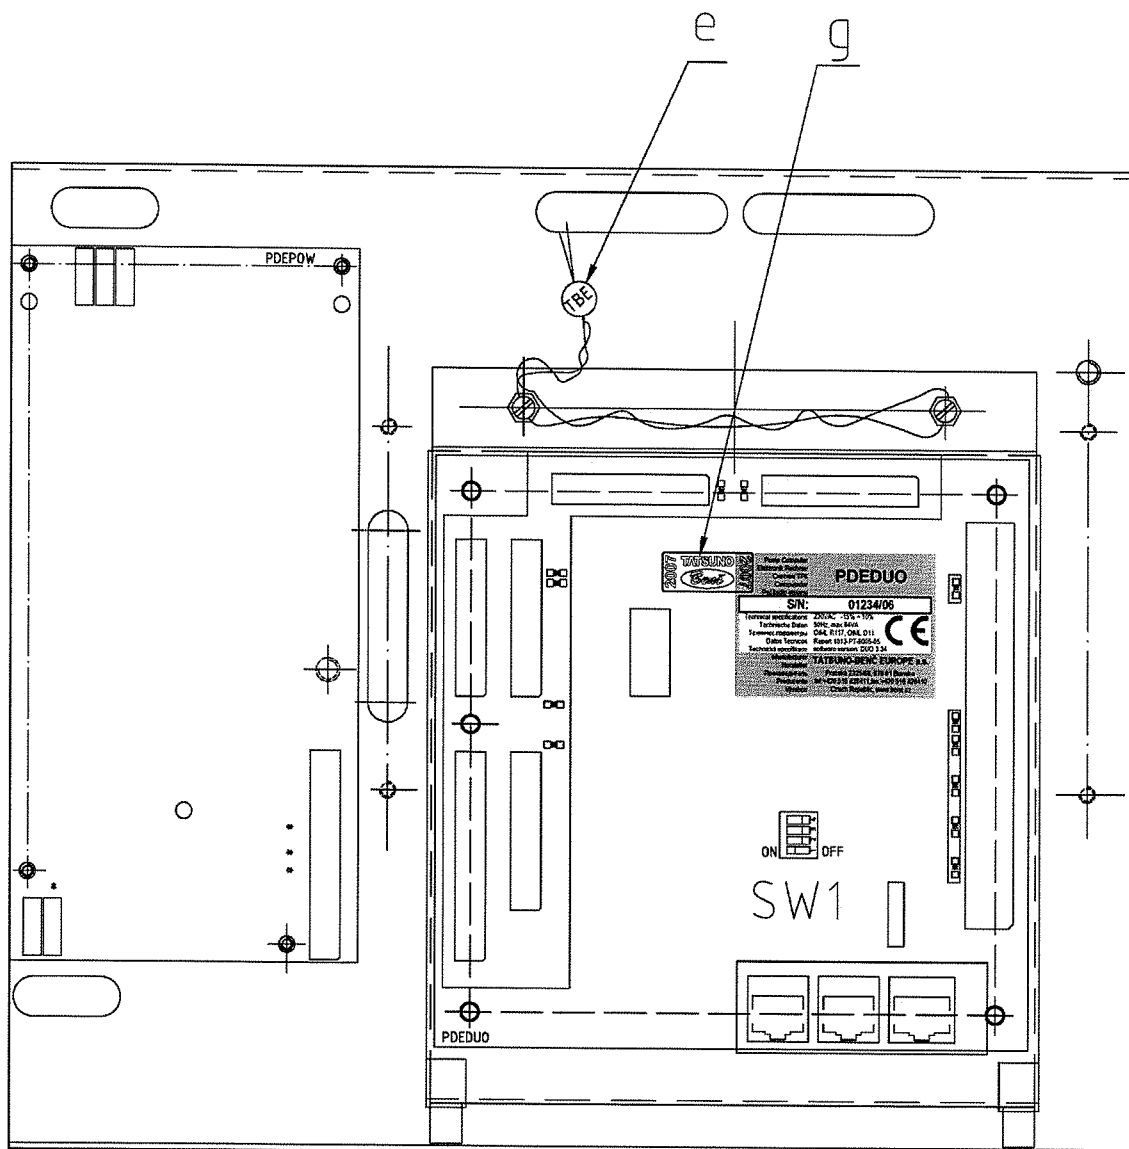


Technical drawing of the front panel of a PDEVOL 1000 device. The drawing shows a rectangular panel with a central display area, a control panel with buttons, and a label with technical specifications. The label includes the model name 'PDEVOL 1000', a serial number 'S/N: 01234/07', and various technical details. The drawing is annotated with dimension lines and labels: 'e(f)' for the top edge, 'g' for the right edge, and 'TBE' for the control panel area.


Picture No. 6: The sealing of totalizing indicating device

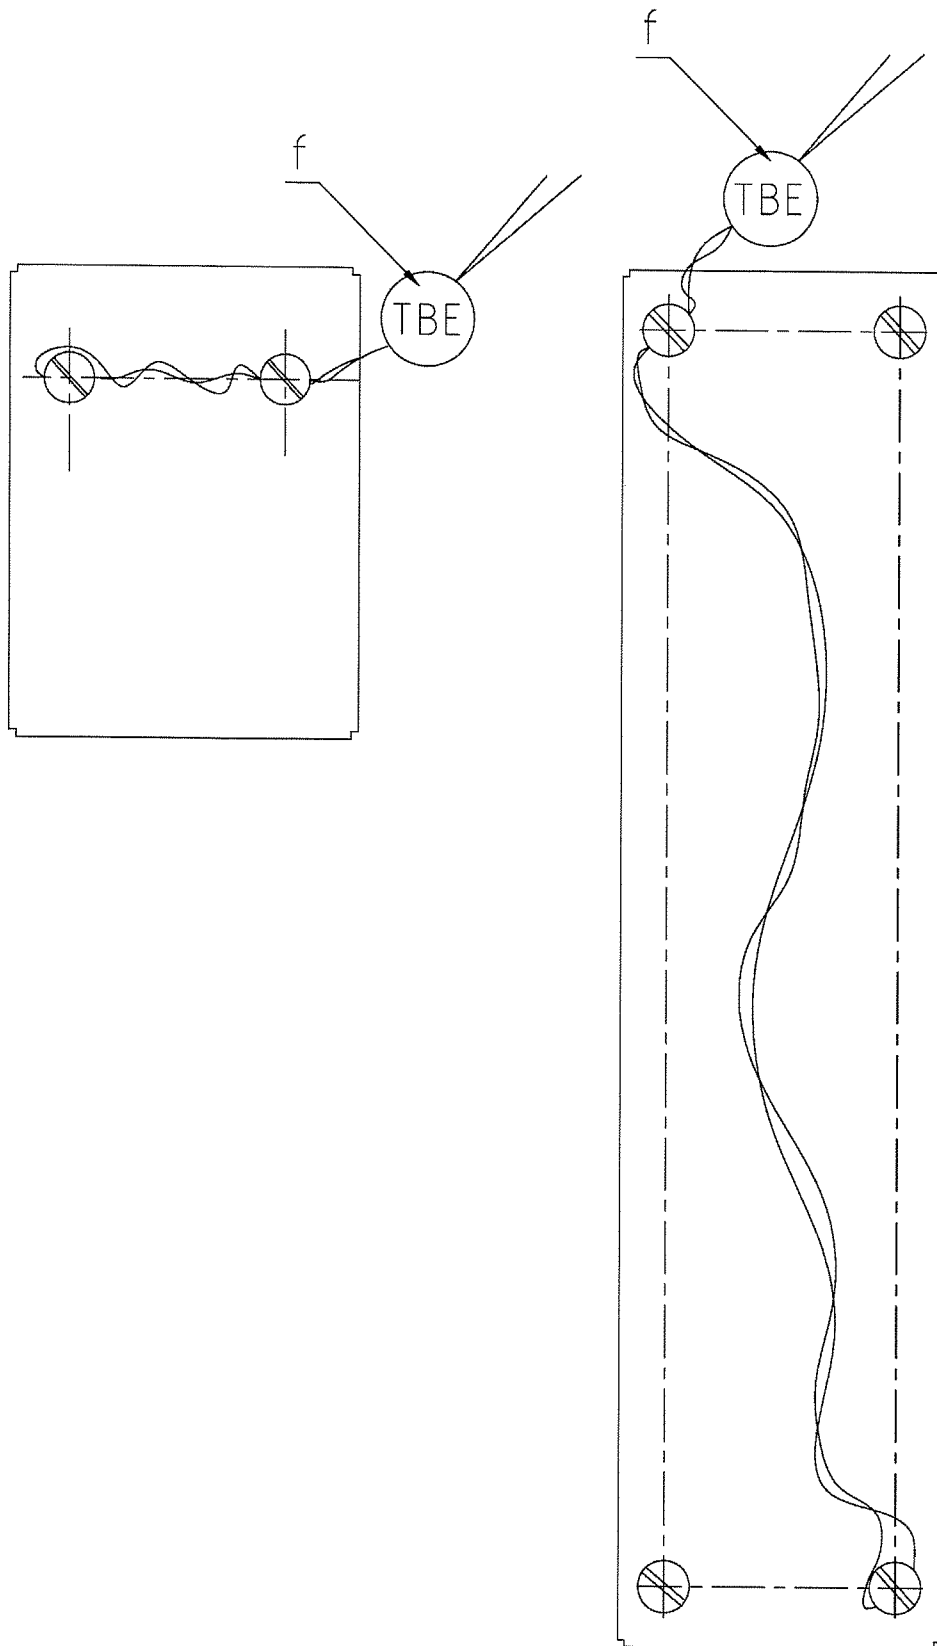


Picture No. 7: The sealing of PDEMPDX calculator

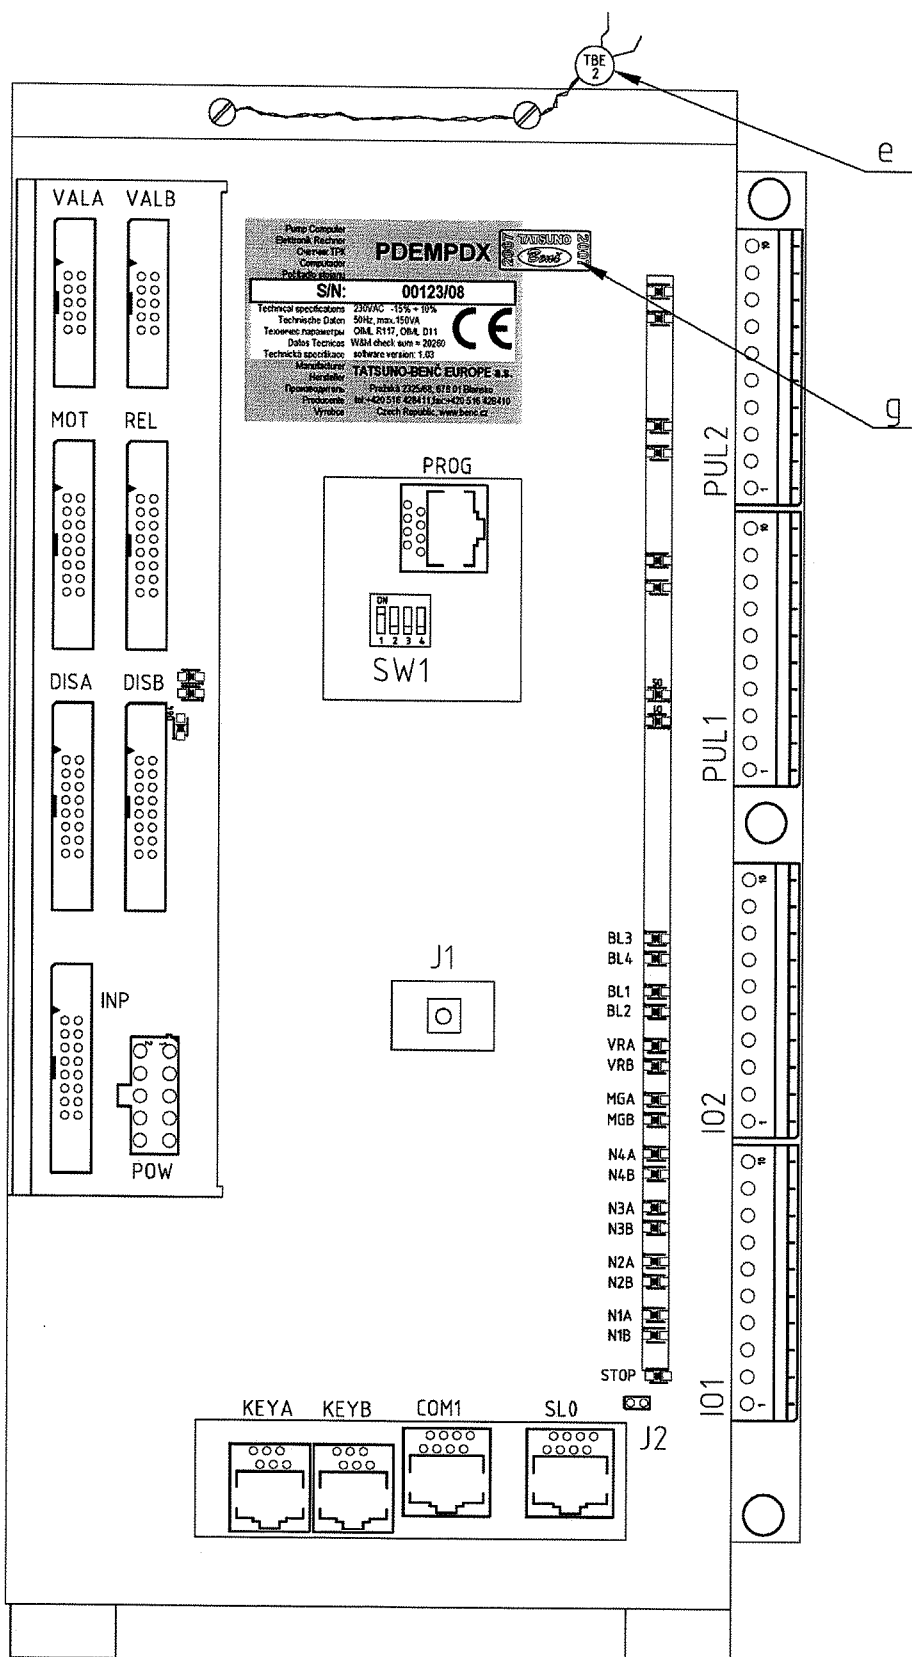


Picture No. 8: The sealing of PDEDUOX calculator

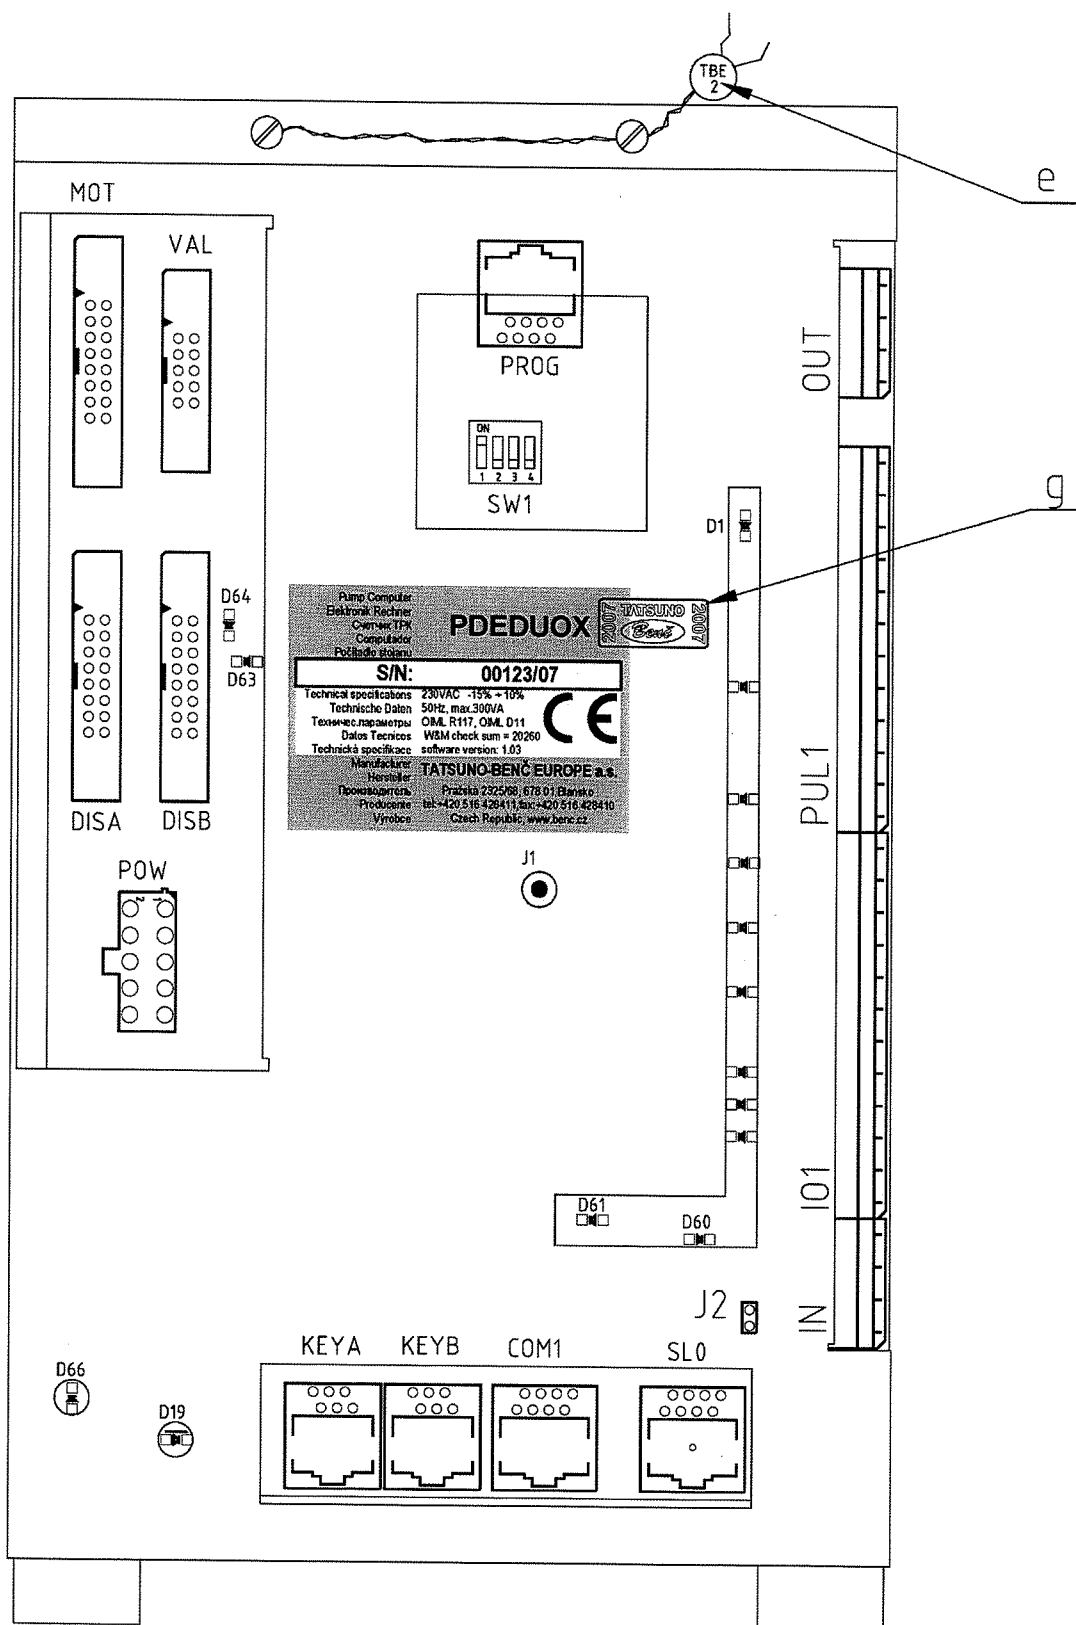


Picture No. 9: The sealing of ADP1/T and ADP2/T calculator

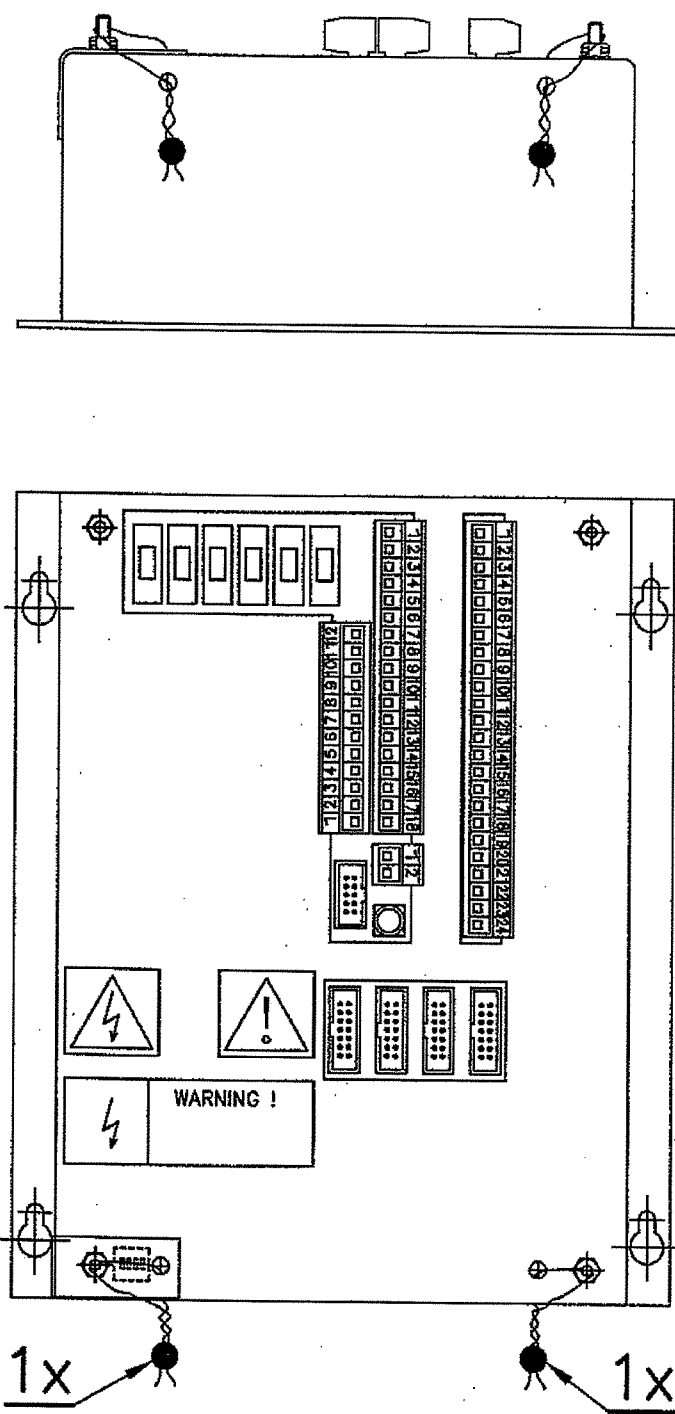


Picture No. 10: The sealing of ADPMPDx/T calculator

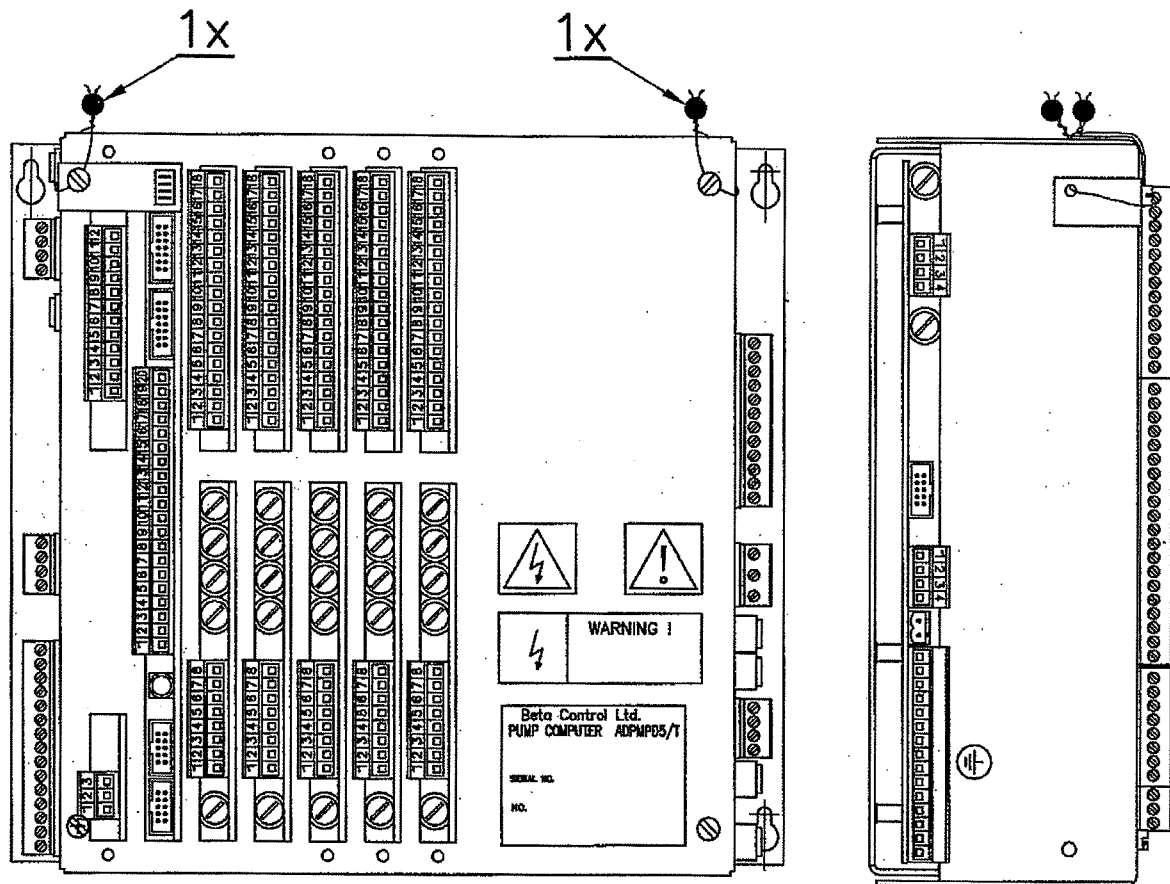

Picture No. 11: The sealing of totalizing indicating device (ADPx/T, ADTMPDx/T)

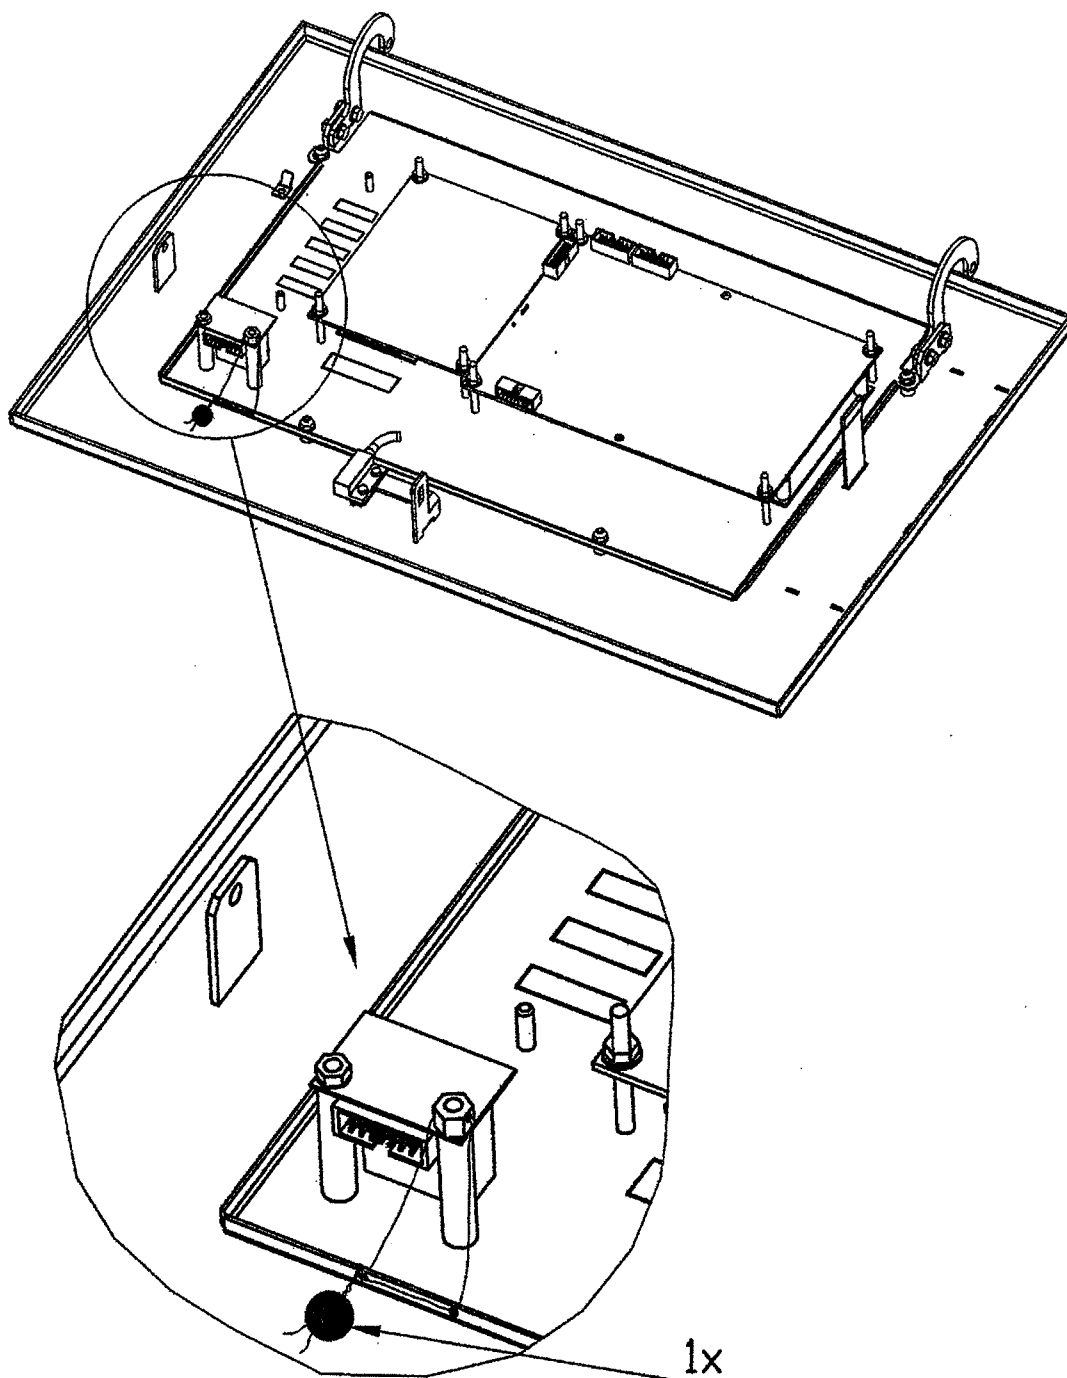

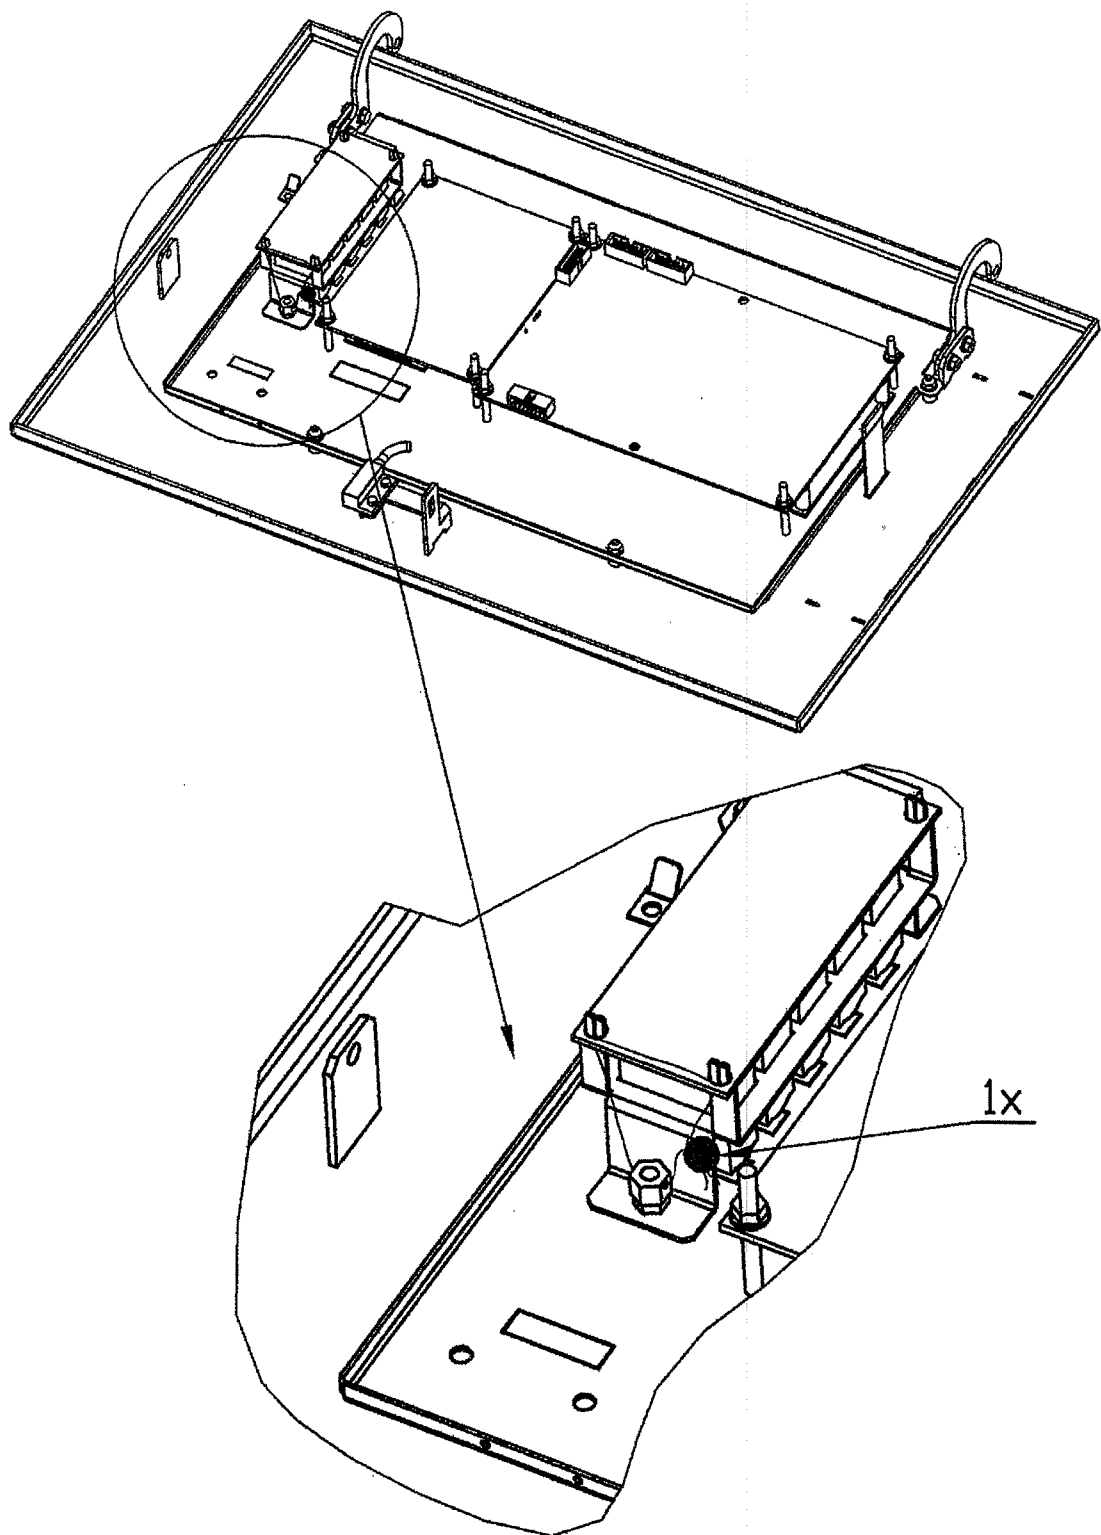

6

